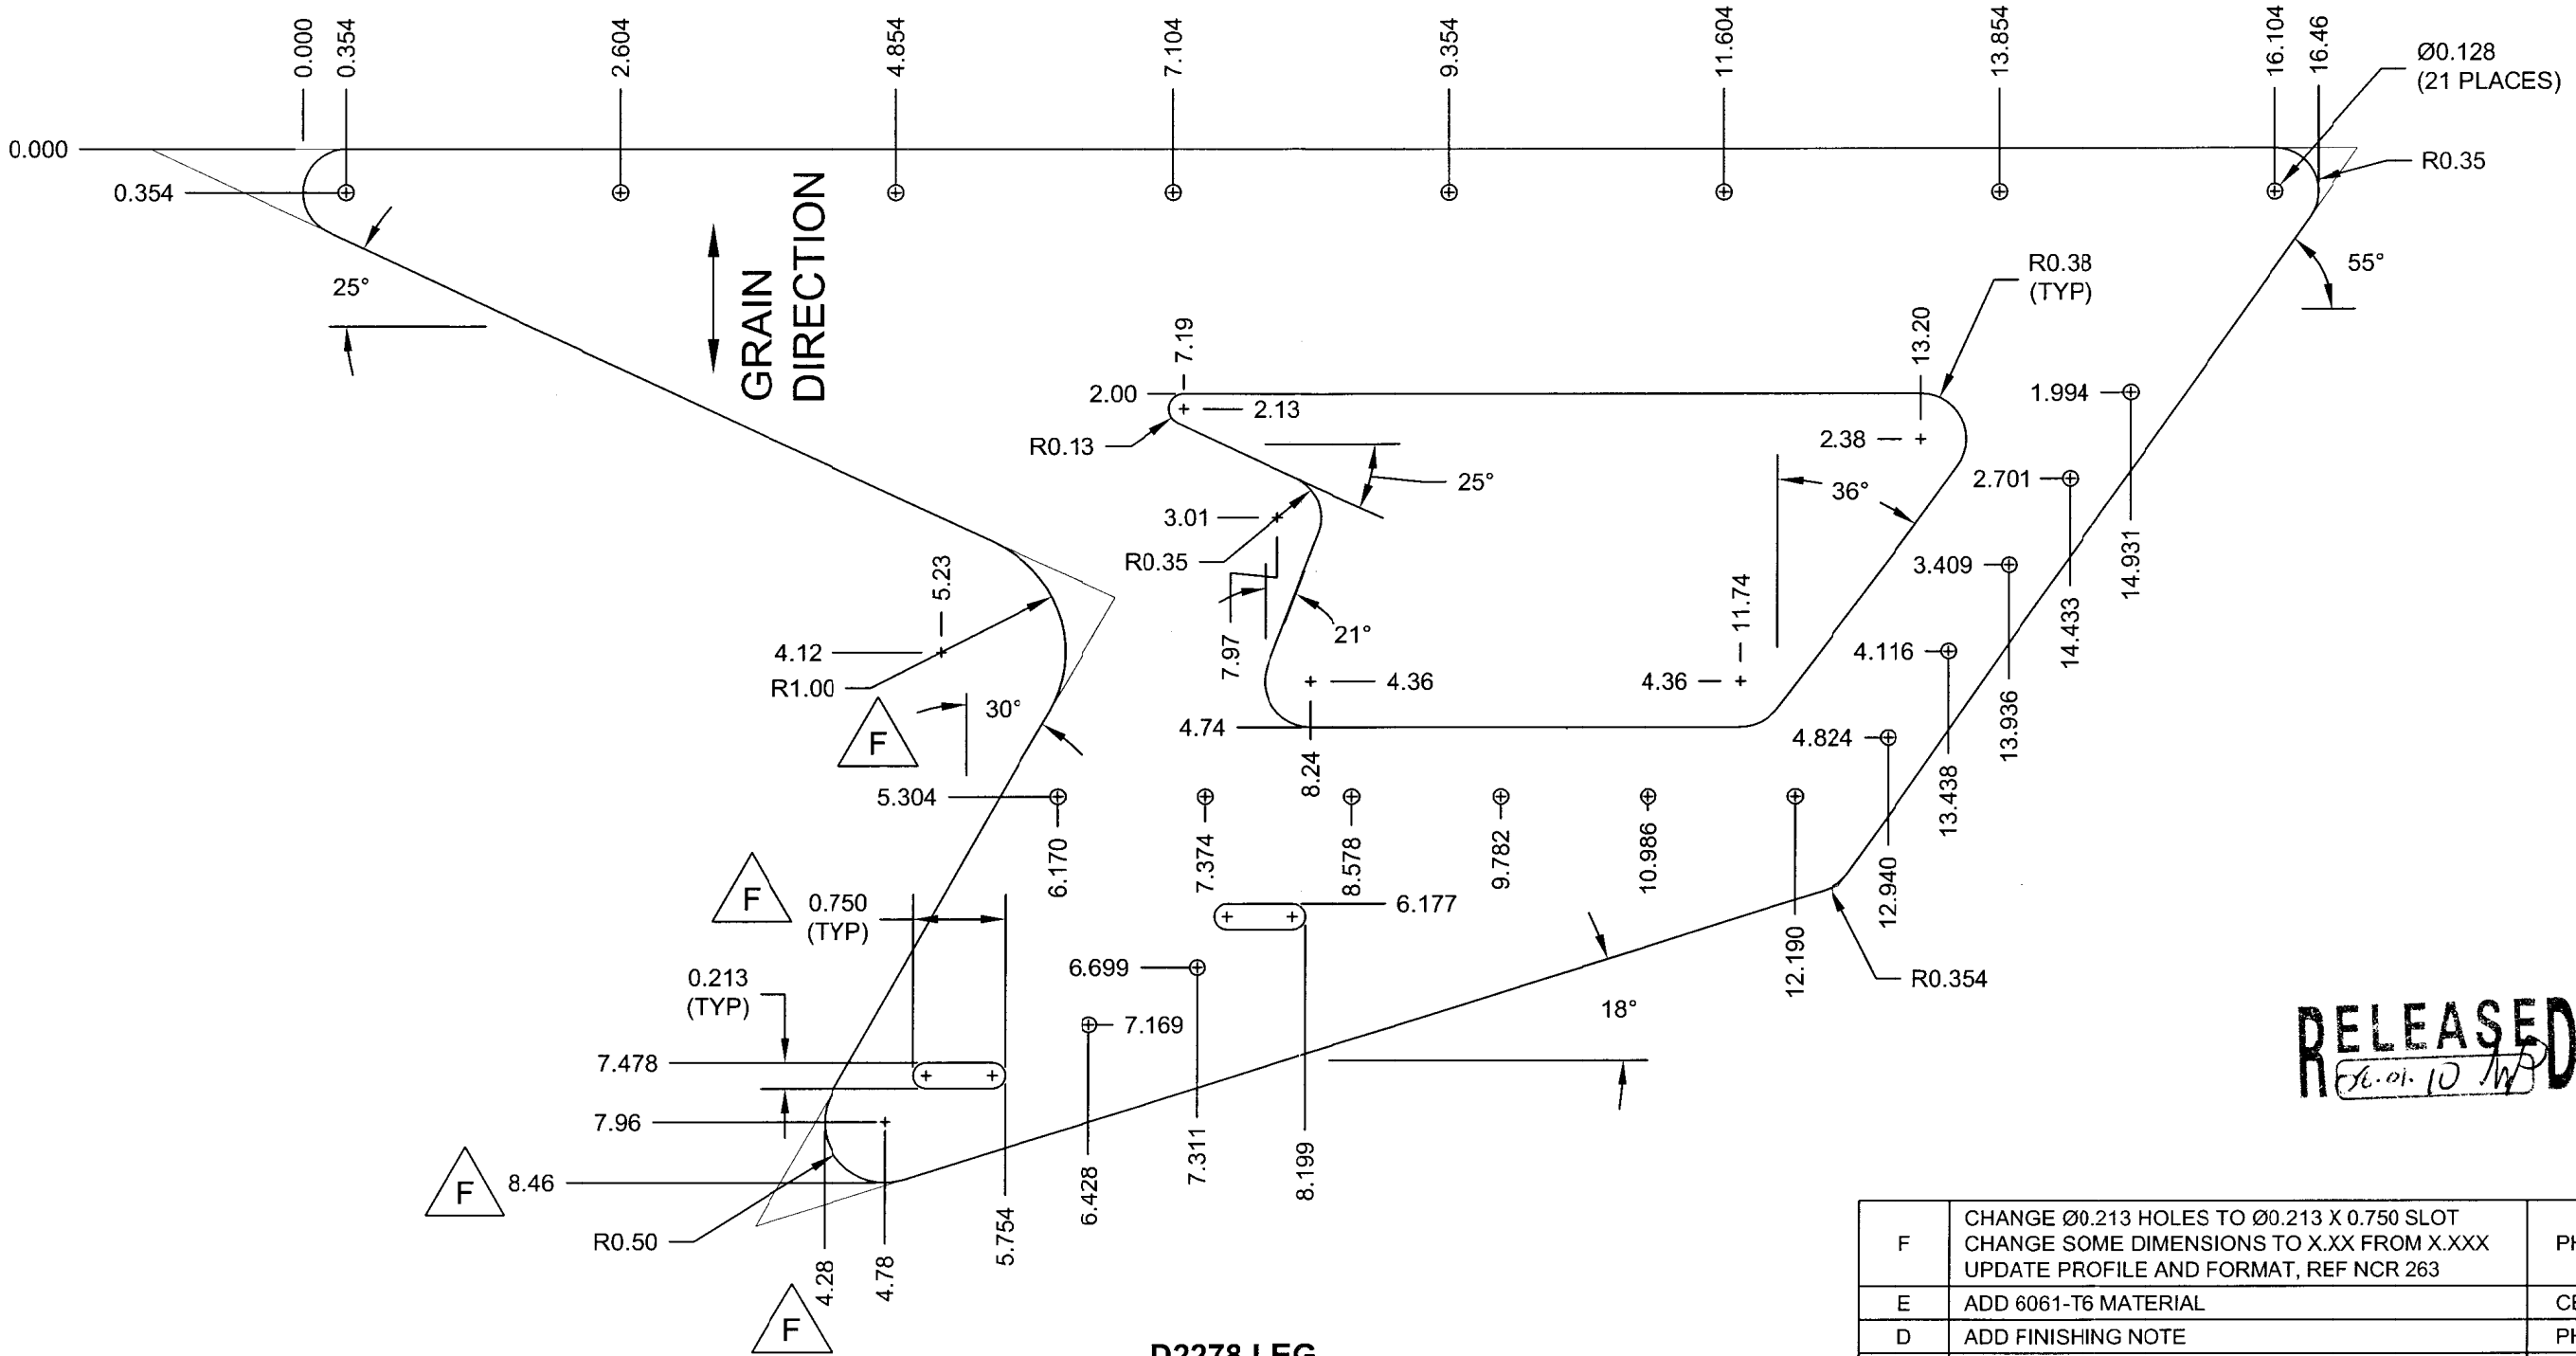

RELEASED
14.01.10

D2278 LEG

NOTES:

1) MATERIAL: 6061-T6 (OR -T62) ALUMINUM SHEET 0.080 THICK (PER QQ-A-250/11 OR AMS 4025/4027)
(REF DART SPEC M6061T6S.080)
OR
5052-H32 ALUMINUM SHEET 0.080 THICK (PER QQ-A-250/8 OR AMS 4016)
(REF DART SPEC M5052H32S.080)
2) FINISH: CHEMICAL CONVERSION COAT PER DART QSI 005 4.1
3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
4) UNITS: INCHES UNLESS OTHERWISE NOTED
5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
6) IDENTIFICATION: N/A
7) WEIGHT: 0.45 lbs

REV.	DESCRIPTION	BY	DATE
F	CHANGE Ø0.213 HOLES TO Ø0.213 X 0.750 SLOT CHANGE SOME DIMENSIONS TO X.XX FROM X.XXX UPDATE PROFILE AND FORMAT, REF NCR 263	PH	07.12.27
E	ADD 6061-T6 MATERIAL	CB	06.05.29
D	ADD FINISHING NOTE	PH	05.11.14
C	CHANGED RADIUS TO 0.354	BW	95.02.16
B	CHANGED TO MATCH SPACERS	BW	94.11.08
A	NEW ISSUE	BW	94.10.13

DESIGN		**DART AEROSPACE LTD**	
DRAWN		**HAWKESBURY, ONTARIO, CANADA**	
CHECKED		DRAWING NO.	REV. F
MFG. APPR.		D2278	SHEET 1 OF 1
APPROVED		TITLE	SCALE
DE APPR.		LEG	3:2
DATE	07.12.27		

COPYRIGHT © 1995 BY DART AEROSPACE LTD
THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.